


GROOVED COUPLINGS

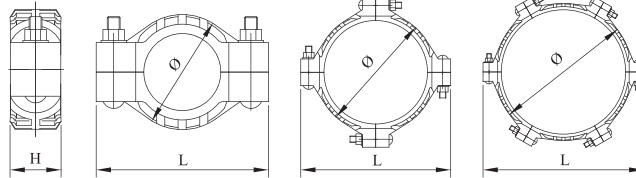

XGQT2G Standard Flexible Coupling

Nominal Size		Pipe O.D. mm	Max.Working Pressure		Allowable Pipe End Sop mm	Max End Load N	Bolt Size mm	Dimensions		
Inch	mm		KPa	psi				φ	L	H
1	25	33.7	5500	800	3	4906	2-M10x50	60	100	44
1 1/4	32	42.4	5500	800	3	7766	2-M12x70	69	112	48
1 1/2	40	48.3	5500	800	3	10478	2-M12x70	75	119	48
2	50	57								
2	50	60.3	5500	800	3	15707	2-M12x70	86	132	48
2 1/2	65	73	5500	800	3	23020	2-M12x75	103	145	48
2 1/2	65	76.1	5500	800	3	25016	2-M12x75	106	149	48
3	80	88.9	5500	800	3	34139	2-M12x75	118	162	48
4	100	108	5500	800	6.8	50384	2-M16x85	144	202	54
4	100	114.3	5500	800	6.8	56434	2-M16x85	152	212	54
5	125	133	5500	800	6.8	76410	2-M20x110	173	246	54
5	125	139.7	5500	800	6.8	84301	2-M20x110	178	252	54
5	125	141.3	5500	800	6.8	86244	2-M20x110	180	255	54
6	150	159	4825	700	6.8	95307	2-M20x110	199	275	54
6	150	165.1	4825	700	6.8	102760	2-M20x110	207	286	54
6	150	168.3	4825	700	6.8	106783	2-M20x110	211	290	54
8	200	216.3	4125	600		146981				
8	200	219.1	4125	600	6.8	150811	2-M22x130	263	346	64
10	250	267.4	4125	600		224632				
10	250	273	4125	600	6.8	234140	2-M24x150	327	422	67
12	300	318.5	4125	600		318690				
12	300	323.9	4125	600	6.8	329587	2-M24x150	380	474	67
12	300	325	4125	600		331830				
14	350	355.6	2065	300	5	208560	4-M24x130	405	507	74
14	350	377	2400	360	5	279070	4-M24x130	426	527	76
16	400	406.4	2065	300	5	272405	4-M24x130	450	559	74
16	400	426	2400	360	5	356327	4-M24x130	476	577	76
18	450	457.2	2065	300	5	344763	4-M27x150	510	623	80
18	450	480	2400	360	5	452389	4-M24x130	532	633	78
20	500	508	2065	300	5	425633	4-M27x150	561	675	80
20	500	530	2400	360	5	463298	4-M27x150	583	696	81
24	600	610	1725	250	5	511432	6-M27x150	663	777	80
24	600	630	2400	360	5	779311	6-M27x150	684	797	81

All data contained here is subject to change without notice.
Note: Max. working pressure refers to FM registration pressure.